



# E-FLEX GOLD




# Gold Heat Treatment allows safe navigation of any curved canal

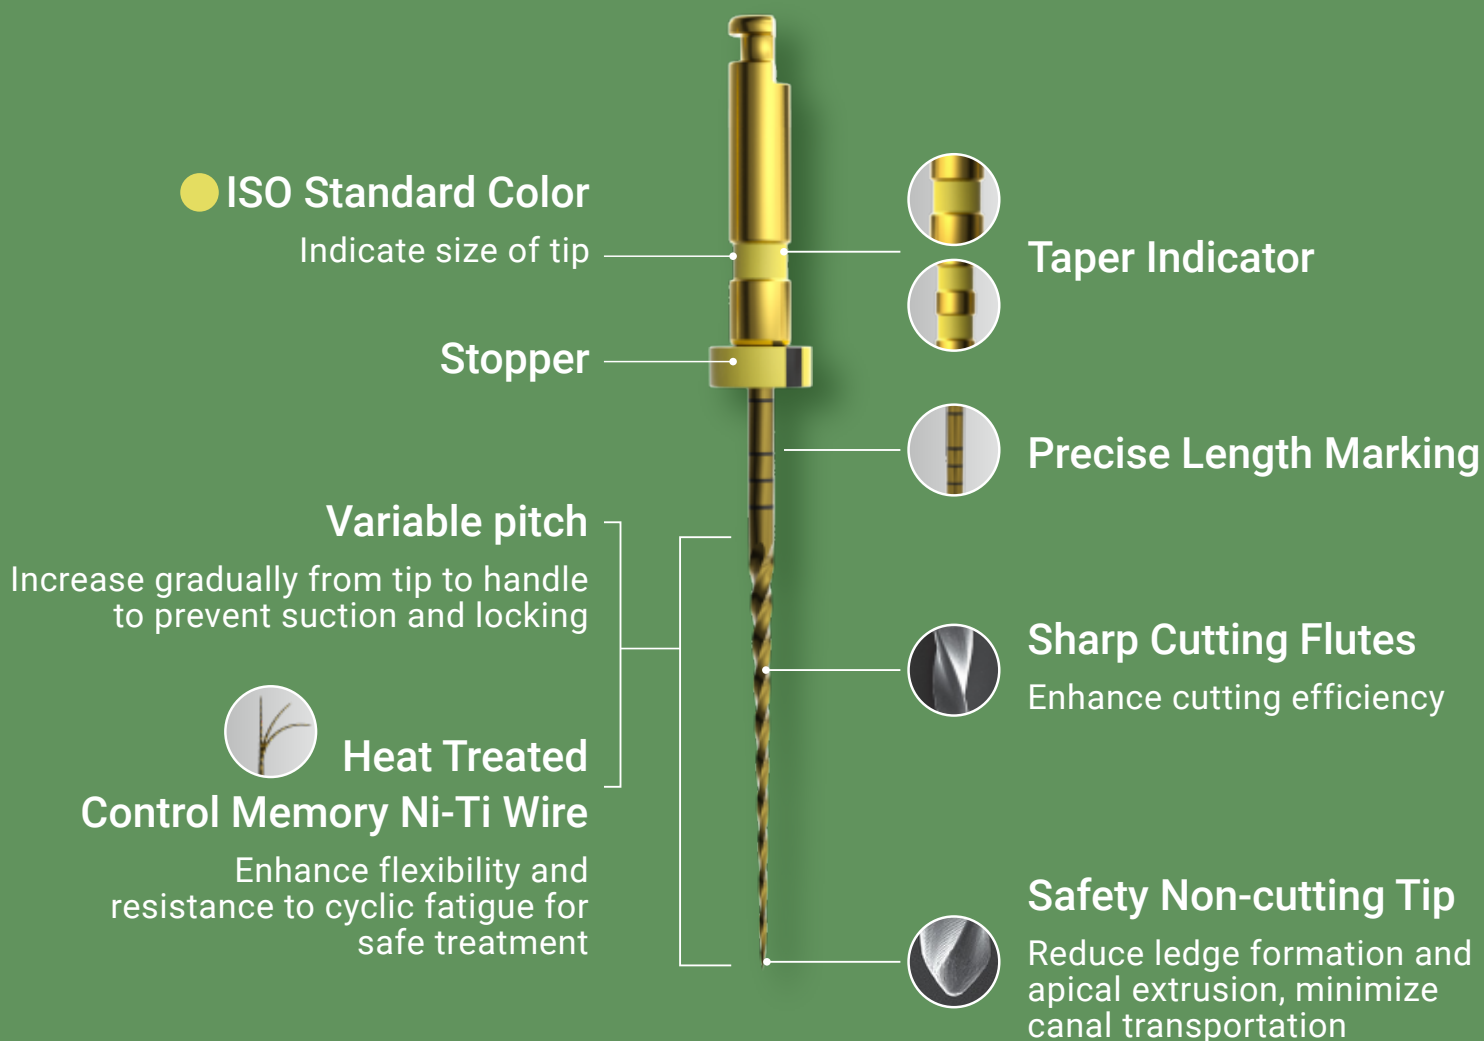


## • Usage Protocol

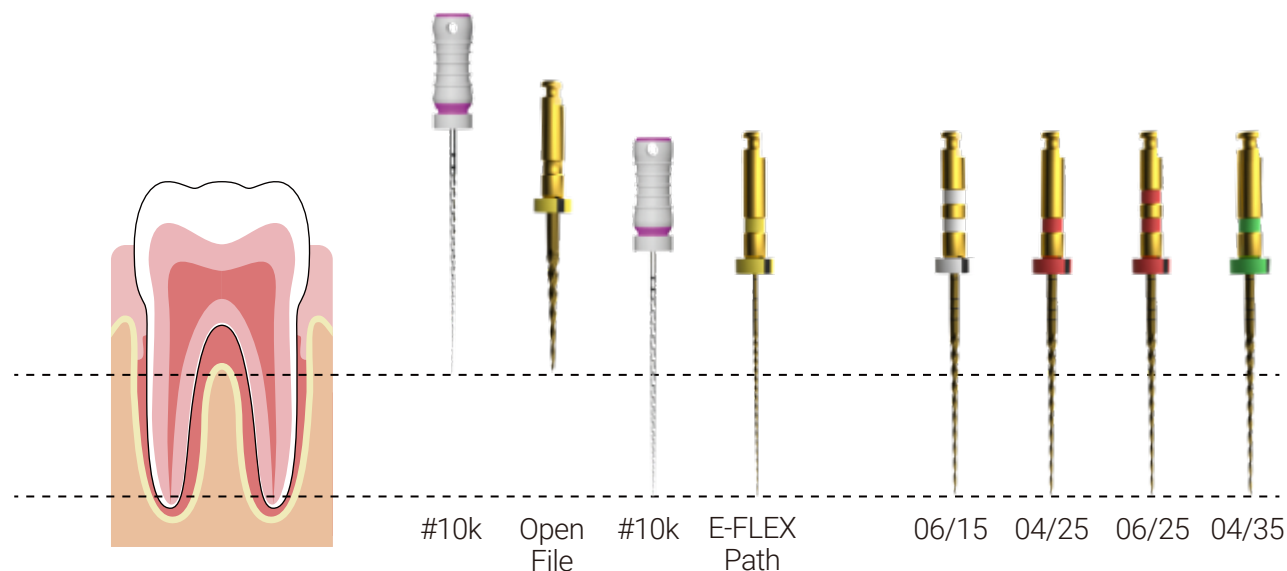

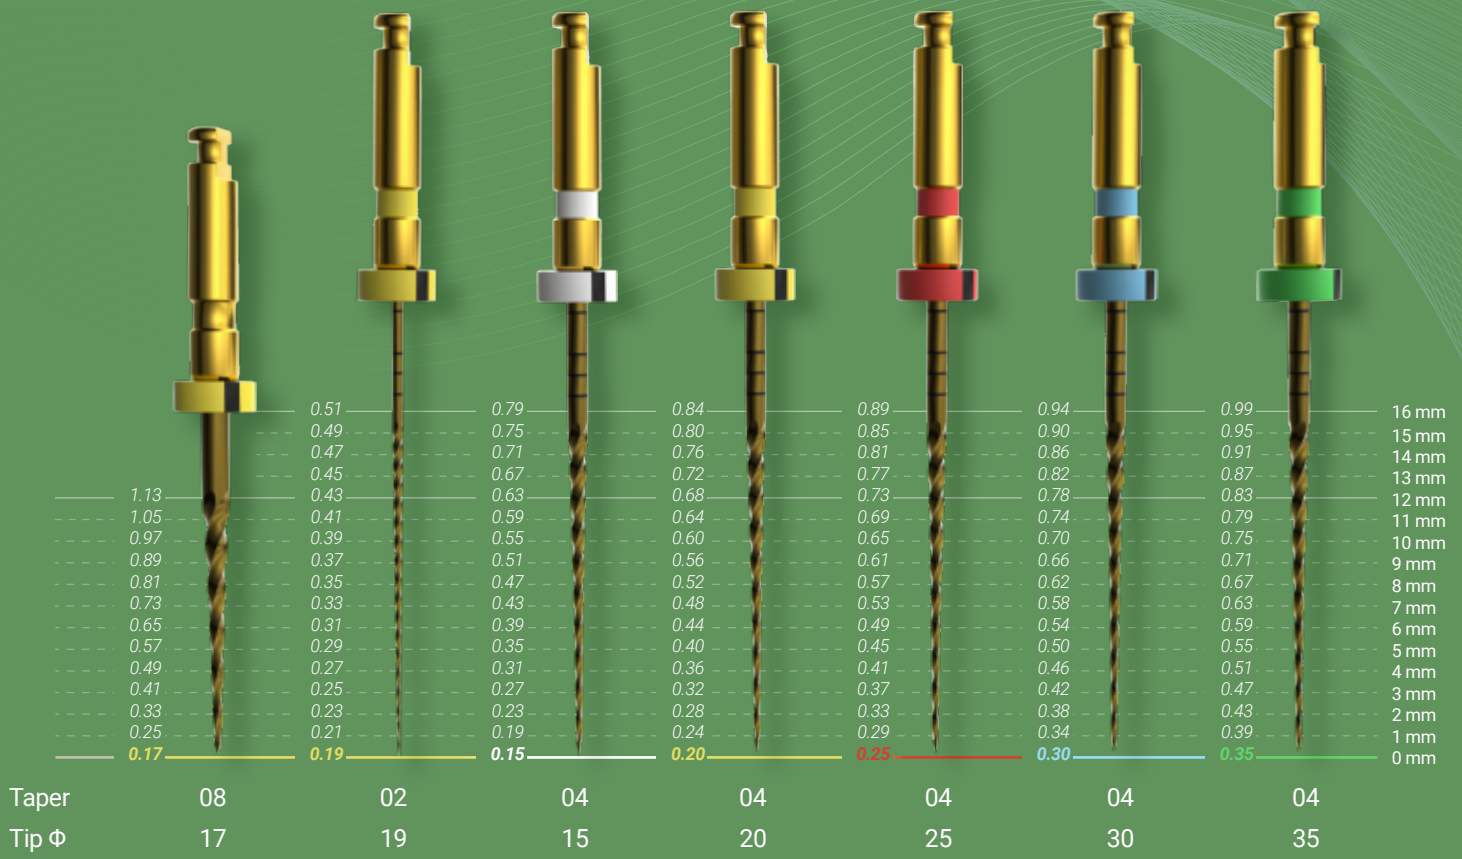

	Color	Tip Size	Taper (%)	Taper Indicator	Cross-Section	Length (mm)	Suggested Speed/Torque
<b>E-FLEX GOLD</b>	●	17	8			19	350 rpm 2 N·cm
	●	19	2			21/25/31	
	○	15	4				
	●	20	4				
	●	25	4				
	●	30	4				
	●	35	4				

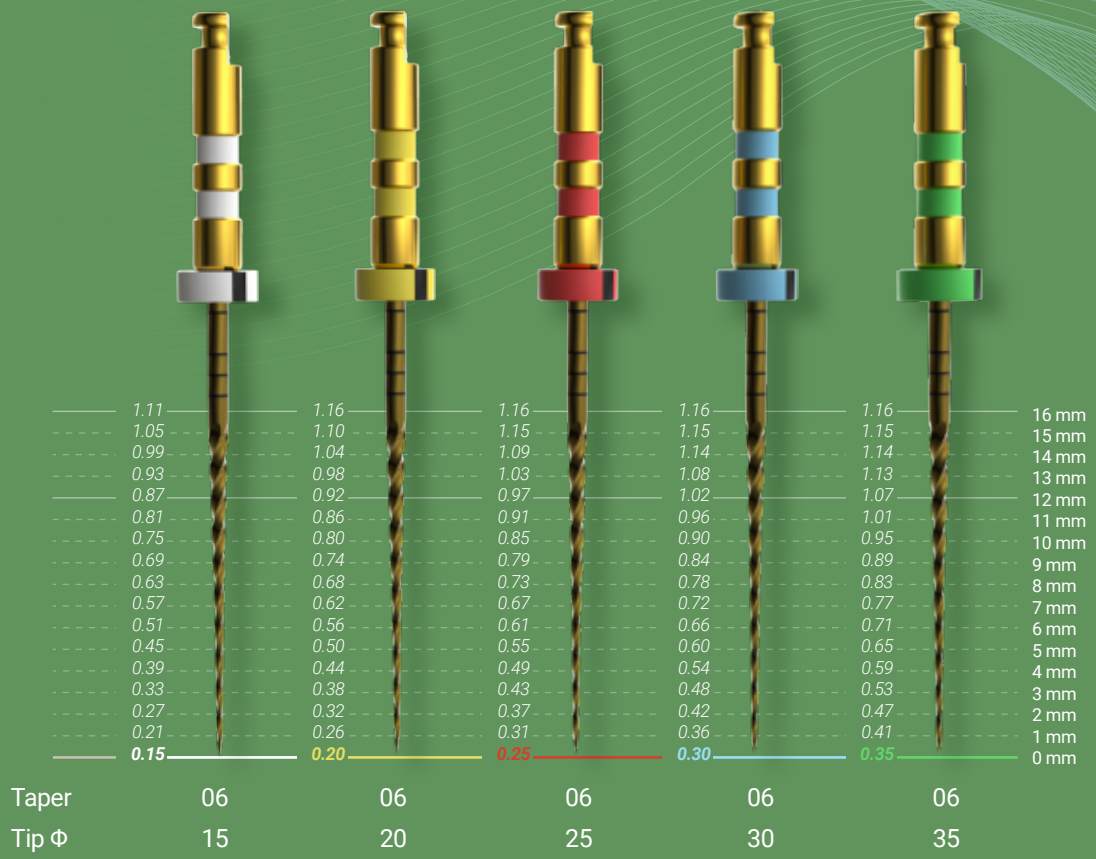

	Color	Tip Size	Taper (%)	Taper Indicator	Cross-Section	Length (mm)	Suggested Speed/Torque
<b>E-FLEX GOLD</b>	○	15	6			21/25/31	350 rpm 2 N·cm
	●	20	6				
	●	25	6				
	●	30	6				
	●	35	6				